

Critical Environment In-tool Blower

MODEL 5822i

SIMCO ION™
An ITW Company



The compact design of the Critical Environment In-tool Ionizing Blower, Model 5822i, meets small-footprint ionizer requirements in automated process tools, offering exceptional performance in hard disk drive manufacturing and back-end semiconductor environments.

The ionizer maintains a $\pm 3V$ or better balance standard and exceptional $\pm 1V$ Novx System by external feedback. An internal, automatic balance correction system ensures your target is ionized accurately, significantly reducing calibration and maintenance time and resulting in cost savings. A collimator installed over the fan directs precisely balanced ionized air to the target without occupying valuable space in your environment.

FEATURES

- ✓ $\pm 3V$ or better balance ($\pm 1V$ with the Novx System)
- ✓ Facility Monitoring System (FMS) connection and audible alarm
- ✓ Separate control box
- ✓ Cleanliness rated at ISO 14644-1 Class 4

BENEFITS

- ✓ Provides the best corona-based ESD critical environment protection available for maximizing yields
- ✓ Faster response to ionization failure with notification through tool or FMS
- ✓ Allows the blower to be situated close to the target area for fast electrostatic discharge
- ✓ Designed for use in an environment with a controlled level of contamination

invisible problems
visible results™
Tackling Static & Particulate Contamination

Model 5822i	
Input Voltage	24 VDC @ 1A from external power supply (100-240 VAC 50/60 Hz) or from tool power
Discharge¹	Between 2-2.5 sec @ 12" (30.5 cm) (typ) Measured in-line from the center of the fan (±1000V-100V)
Balance	±3V or better; ±1V with the Novx System
Ion Emission	Steady-state DC Technology
Emitter	Tungsten, 8 per blower; Titanium optional
Cleanroom Class	ISO 14644-1 Class 4
LED Indicator	Control Box: green POWER ON, red ALARM
Control	Balance adjust, gain adjust, fan "slow/off/fast" switch, variable "slow" fan speed
Airflow	20.5 cfm (typ)
Audible Noise	<56 dB, typical measurements taken 12" (30.5 cm) from fan
Operating Env	50-95°F (10-35°C); 30-60% RH, non-condensing
Mounting	2 mounting screw holes on bottom of blower, 1.20" (3.05 cm) apart
Enclosure	Stainless Steel
Dimension	Fan Unit: 4.57"H x 3.27"W x 3.47"D (11.6 x 8.31 x 8.81 cm) Control Box: 1.0"H x 5.2"W x 2.35"D (2.54 x 13.2 x 5.97 cm)
Weight	Blower 1.14 lb (0.52 kg); Control Box 0.56 lb (0.25 kg)
Warranty	Two year limited warranty
Certification	   

1. Tested in accordance with ANSI/ESD STM3.1.

Ordering Information

92-5822i-001	Blower Kit with Tungsten Emitter Points (includes fan unit, control box, DC power supply kit and all interface cables)*	
92-5822iC-001	Blower Kit with Titanium Emitter Points (includes fan unit, control box, DC power supply kit and all interface cables)*	
Kit Contents (may be ordered separately)	91-5822i	Fan Unit with Tungsten Emitter Points
	91-5822iC	Fan Unit with Titanium Emitter Points
	91-5822i-CTRL	Control Box
	33-5820-01	5822i Accessory Kit (see below for contents)
33-1440-01	DC Power Supply Kit, 100-240 VAC to 24 VDC 1A, interconnect cable with RJ-9 4P/4C plug*	
33-5820-01	5822i Accessories Kit (includes 33-1440-01 power supply kit, fan to control box cable and FMS out to Novx antenna cable)*	
33-25822i-10	Ionizing Blower Mounting Stand	
33-25822i	Tungsten Emitter Point Replacement Kit	
33-25822iC	Titanium Emitter Point Replacement Kit	

* IEC power cord required, contact Sales Services for detail


±1V Balance Performance with Novx System

The Model 5822i ionizer's external feedback antenna operates with the Novx 7000 Process Monitor and with the Novx 3352 Passive or Novx 3362 Active Closed-loop Ionizer Controllers to detect and automatically correct the balance. With the antenna placed at the target area, feedback is sent to the Model 5822i blower's internal control system. This ensures that your target maintains a ±1V or better balance at all times, no matter what environmental variables exist.




Directed Airflow

The collimator fits over the air outlet of the blower and directs ionized air straight to the target. This means that the blower can be placed further away from the target with continued excellent discharge times and good performance at extended distances. This faster, directed airflow method improves ion and static elimination, significantly minimizing ion recombination.



Control Box

The modular remote Control Box was developed to accommodate limited tool footprints. The Control Box connects to the optional Novx 7000 Process Monitor and with the Novx 3352 Passive or Novx 3362 Active Closed-loop Ionizer Controllers and common FMS (Facility Monitoring System) interfaces. This allows the ionizer to be installed into tight, hard-to-reach spaces without fitting additional connections or wiring into the area.

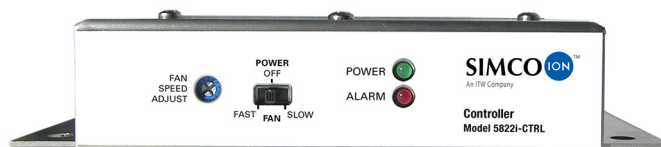

Simco-Ion, Technology Group

1141 Harbor Bay Parkway
Suite 201
Alameda, CA 94502

+1 (800) 367-2452 (in USA)

+1 (510) 217-0460

salesservices@simco-ion.com

www.simco-ion.com/technology

SIMCO ION™

An ITW Company

DS-5822i_V14 - 7/26

© 2026 Simco-Ion All rights reserved.

w o r l d w i d e l e a d e r s i n s t a t i c c o n t r o l